

HA 8342

WC 12Co

Product Code: 328342
Technical Data Sheet

Revision: # 003
Dated: 01/13/09

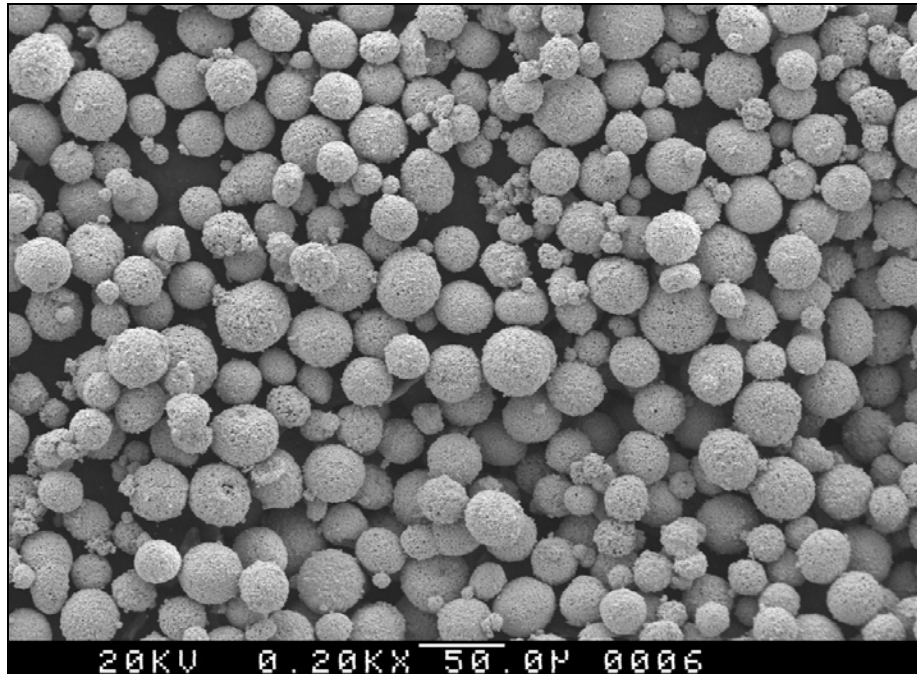


Figure 1: Typical Powder Morphology (SEM 200X)

1. PHYSICAL PROPERTIES

HA 8342 is fine grade spray dried and sintered, dense spherical powder. It produces very dense and smooth, erosion resistant coatings with excellent wear properties for the manufacturing industry.

Molecular Formula	WC 12 Co
Melting Point [°C]	1260
Hall Flow [s/50g] ASTM B213	15 ± 3
Apparent Density [g/cm³] ASTM B212	4.2 ± 0.6

HA 8342

WC 12Co

Product Code: 328342
Technical Data Sheet

Revision: # 003
Dated: 01/13/09

2. CHEMICAL PROPERTIES

2.1. Typical Chemical Analysis

<u>Element</u>	<u>Weight Percent</u>
Tungsten	Balance
Carbon (total)	3.9 - 5.2
Cobalt	10.00 – 12.00
Iron	< 0.10
All Others	< 0.50

3. POWDER MORPHOLOGY AND PARTICLE SIZE DISTRIBUTION

3.1. Powder Morphology

- 3.1.1. Powder has mainly spherical shape as produced by spray dry and sinter processes.
- 3.1.2. Typical Powder Morphology using SEM is shown in Figure 1.

3.2. Particle Size Distribution

- 3.2.1. The typical powder size range measured with Tyler according to ASTM B214 is -325 mesh +15 μ m
- 3.2.2. Table 1 shows the required and typical particle size distribution measured with Microtrac according to ASTM B822
- 3.2.3. Figure 2 shows the typical Microtrac particle size distribution graph

HA 8342

WC 12Co

Product Code: 328342
 Technical Data Sheet

Revision: # 003
 Dated: 01/13/09

Table 1: Typical and Required Microtrac Particle Size Distribution

<u>Percentile</u>	<u>Typical Particle Size</u>		<u>Mean</u>	<u>Required Particle Size</u>
[%]	[μm]			
0.01	15.63		D ₁₀	15 - 25 μm
5.00	23.12			
10.00	25.73			
16.00	27.92		D ₅₀	30 - 40 μm
50.00	36.22			
84.00	45.11			
90.00	47.97		D ₉₀	45 - 60 μm
95.00	51.83			
99.99	73.25			

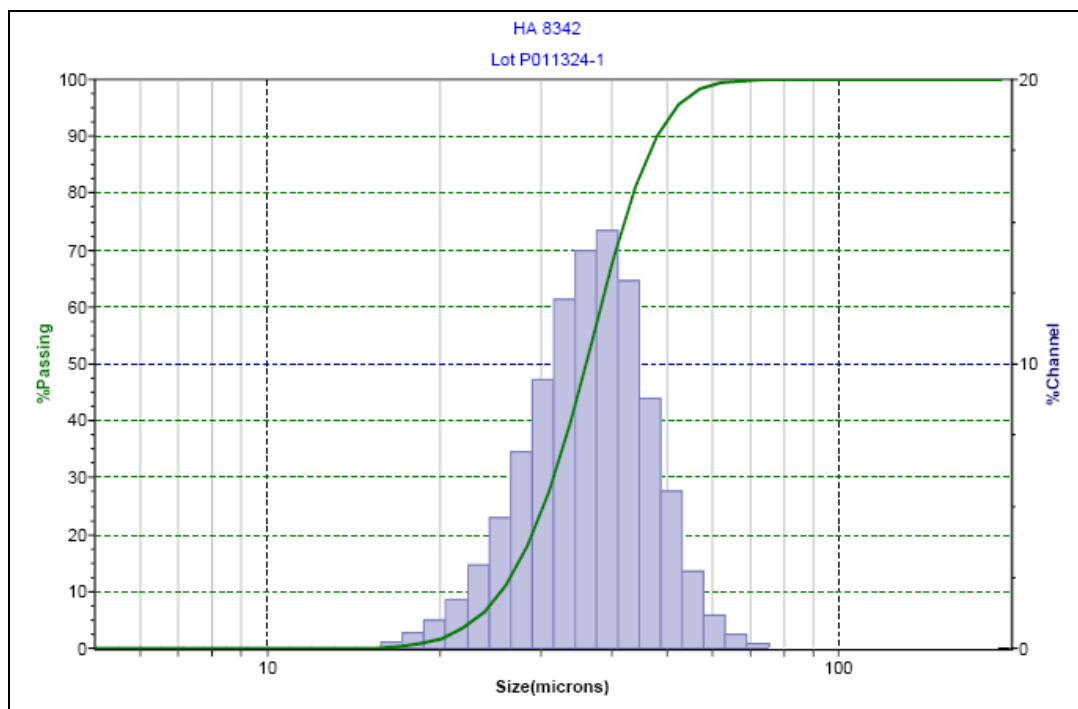


Figure 2: Typical Microtrac Particle Size Distribution